



by **Schneider** Electric

Easy PDU Basic Rack Power Distribution Unit

Overview


EPDU1010B-SCH

The APC by Schneider Electric Easy PDU, Basic Rack Power Distribution Unit EPDU1010B-SCH distributes power to devices in the rack.

Outlets. The Rack PDU has six (6) SCHUKO and one (1) IEC 320 C13, 10A outlets.

Power cord. The power cord is 2.5 m (8.2 ft) in length.

Mounting. Two brackets and mounting hardware are provided with the Rack PDU. The Rack PDU can be mounted in a 19-inch NetShelter™ rack or other EIA-310-D standard 19-inch rack.

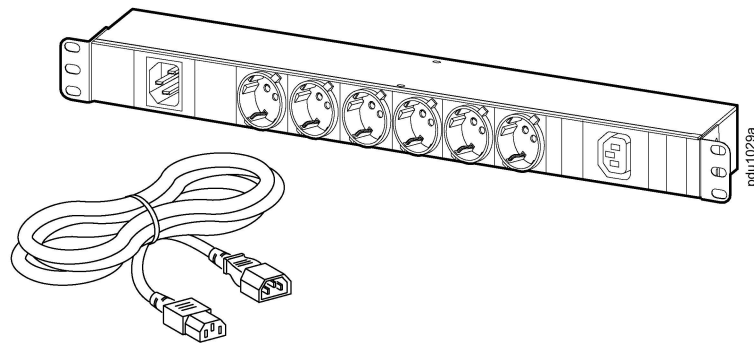

Specifications

Electrical	
Nominal Input Voltage	200 - 240 VAC
Maximum Input Current (Phase)	10A
Input Frequency	50/60Hz
Input Connection	IEC-320 C14 (10A)
Output Voltage	200 - 240 VAC
Maximum Output Current (Outlet)	10A
Maximum Output Current (Phase)	10A
Output Connections	Six (6) SCHUKO (10A), One (1) IEC320 C13 (10A)
Physical	
Dimensions (H x W x D)	44.4 x 482 x 44.4 mm (1.75 x 19 x 1.75 in)
Input power cord length	2.5 m (8.2 ft)
Shipping dimensions (H x W x D)	150 x 560 x 80 mm (3.8 x 22.8 x 3.15 in)
Weight/Shipping weight	0.6 kg (1.32 lb) / 1.1 kg (2.43 lb)
Environmental	
Maximum elevation (above MSL) Operating/Storage	0–3000 m (0–10,000 ft) / 0–15000 m (0–50,000 ft)
Temperature: Operating/Storage	–5 to 45°C (23 to 113°F) / –25 to 65°C (–13 to 149°F)
Humidity: Operating/Storage	5–95% RH, non-condensing
Compliance	
EMC verification	CE EN55035, EN55032, EN55024
Safety verification	CE, IEC62368-1
CE EU Contact Address	Schneider Electric, 35 rue Joseph Monier 92500 Rueil Malmaison France
Environmental	RoHS & Reach

Customer support and warranty information are available on the APC by Schneider Electric website, www.apc.com.

© 2020 APC by Schneider Electric. APC, the APC logo, and NetShelter are owned by Schneider Electric S.E. All other trademarks are property of their respective owners.

990-6374
7/2020